

# STEIGZONE > 3.5M KABELPRITSCHEN MIT WANDBÜGEL




VKF-Zertifikat


## DATEN

Belastung Pritsche	20kg/m
Belastung Schelle	5kg/Schelle
Stützabstand Pritsche	1.5m
Schellenabstand	0.6m
Sprossenabstand	150mm
Konfigurationsnummer	3.06

Montage ohne Box

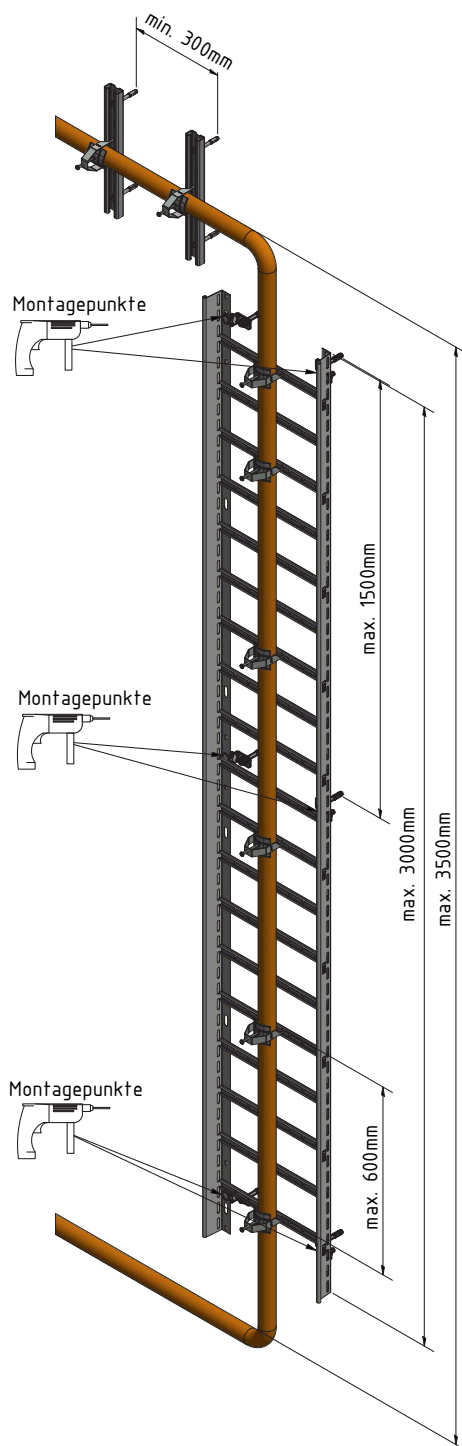

Montage mit Box

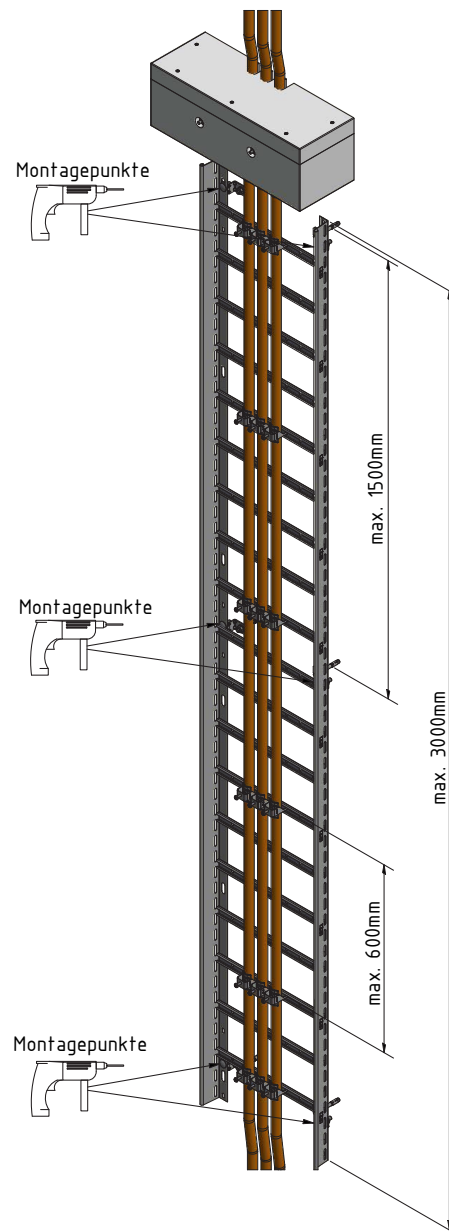

# STÜCKLISTE

N°	PRODUKTEBEZEICHNUNG	ELDAS N°	LANZ N°	ELDAS N°	LANZ N°	ELDAS N°	LANZ N°
<b>KABELPRITSCHKE</b>		SVZ/GVZ		FVZ		A4	

3	200 X 60 Abstand 150	127 000 216	313 445	127 060 216	309 735	127 000 166	306 445
3	300 X 60 Abstand 150	127 000 226	313 446	127 060 226	309 736	127 000 176	306 446
3	400 X 60 Abstand 150	127 000 236	313 447	127 060 236	309 737	127 000 186	306 447



## WANDBÜGEL

2	Wandbügel	-	-	-	-	127 049 016	306 110
---	-----------	---	---	---	---	-------------	---------



## ZUBEHÖR

1	Bolzenanker FAZ II 10/10 K GS M10 X 75	127 090 836	339 000	-	-	127 090 876	369 000
1	Betonschraube FBS II 10 X 90	160 010 016	339 040	-	-	160 010 006	369 040



5	Schnellverleger 8-15	120 150 626	307 575	-	-	120 140 626	306 575
5	Schnellverleger 15-20	120 151 326	307 576	-	-	120 141 326	306 576
5	Schnellverleger 20-26	120 152 326	307 577	-	-	120 142 326	306 577
5	Schnellverleger 26-33	120 153 326	307 578	-	-	120 143 326	306 578
5	Schnellverleger 32-40	120 154 726	307 579	-	-	120 144 726	306 579
5	Schnellverleger 40-50	120 155 826	307 580	-	-	120 145 826	306 580



	Aufkleber Funktionserhalt	127 099 599	302 140	-	-	-	-
--	---------------------------	-------------	---------	---	---	---	---



## VARIANTE 1: UMLENKUNG MIT MULTIFIX PROFIL

Pro Umlenkung werden zwei Multifix Profile benötigt.

### MULTIFIX PROFIL

4	50 X 25 X 200	127 088 006	350 000	-	auf Anfrage	127 088 906	306 902
4	50 X 25 X 300	127 088 016	350 001	-	auf Anfrage	127 088 916	306 903
4	50 X 25 X 400	127 088 026	350 002	-	auf Anfrage	127 088 926	306 904
4	50 X 25 X 500	127 088 036	350 003	-	auf Anfrage	127 088 936	306 905



## VARIANTE 2: STEIGZONEN BOX

### STEIGZONEN BOX INKL. MULTIFIX PROFIL BESCHICHTET

6	Box L = 100	127 099 826	302 251	-	-	-	-
6	Box L = 200	127 099 836	302 252	-	-	-	-
6	Box L = 300	127 099 846	302 253	-	-	-	-
6	Box L = 400	127 099 856	302 254	-	-	-	-



Zubehör zur Steigzonen Box siehe Seite 56/57

## GEPRÜFTE KABELBAUARTEN

(N)HXH FE180 E90	geprüft: <b>E90</b>
(N)HXCH FE180 E90	geprüft: <b>E90</b>
(N)HXH FE180 E30-E60	geprüft: <b>E90</b>
(N)HXCH FE180 E30-E60	geprüft: <b>E60</b>

JE-H(St)H FE180 E30-E90	geprüft: <b>E30</b>
JE-H(St)HRH FE180 E30-E90	geprüft: <b>E90</b>